
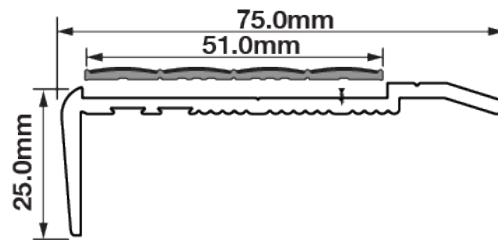


Product Data Sheet – Stair Nosing F12A-350



The F12A-350 provides step edge contrasting colour and long-lasting non-slip protection in preventing slips and falls in all weather conditions.

COMPLIANCE

Complies with BCA Code On Accessibility In The Built Environment 2013 Clause 4.11.2.2 that required all steps shall be fitted with non-slip nosing strips between 50 mm and 65 mm in width with permanent contrasting colours.

Compliance to Workplace Safety and Health Act in preventing slips and falls in Workplace.

PERFORMANCE

The hard-wearing silicon carbide non-slip material is integrally bonded to the aluminum substrate meaning thousands of people can walk on Ecoglo Products thousands of times.

The non-slip material provides all weather protection from slips and falls.

Anti-slip Properties – AS/NZ 4586-2013 Classification: P5

SUPPLY

The products are available in 2.40 metre or 3.0 metre. Cut lengths can be fabricated on site or in factory.

COMPOSITION

The F12A Stair Nosing profile consists of 6060T5 aluminium extrusion, dark permark anodised (dark bronze colour) to 20 microns thickness. It is produced from billets containing recycled aluminium and virgin aluminium. It is a certified Singapore Green Label Product (043-080-1984).


Ecoglo N3-050 Non-Slip Strip, Yellow 51.0 mm width is adhesively fixed into the extrusion. The non-slip strip N3-050 is manufactured from extruded 6060T5 aluminium section. Silicon Carbide non-slip materials are embedded in thermoset polyester carriers to integrally bond the active ingredients into the aluminium following curing at high temperature.

INSTALLATION

The F12A-350 Stair Nosing utilizes hidden fixers for installation or exposed fixers to confirm sound installation for ongoing maintenance inspections.

The F12A-350 can be used on a range of substrates including concrete, timber, tiles, vinyl, steel, checker plate and gratings.

Installation is a simple process using fixers and adhesive. It can also be fitted over steps with an industrial or commercial style carpets that is greater than 8mm thick.

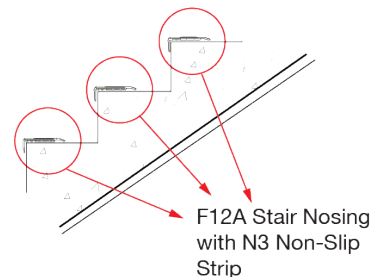

Recommended installation adhesive is Bostik Seal N Flex.
Recommended installation plug is Fischer Plug SX.

Contact

Ecoglo Pte Ltd
111 North Bridge Road #17-06 Peninsula Plaza
Singapore 179098
Phone: 6858 3530 Fax: 6826 4138
email: info@ecoglo.sg URL: www.ecoglo.sg

